

 **TELEDYNE**
ANALYTICAL INSTRUMENTS

SERIES 7500



**NON-DISPERSIVE
INFRARED
GAS ANALYZER**

CO₂, CO, CH₄, SO₂, O₂

Teledyne's Series 7500 Infrared (IR) Gas Analyzer

is capable of detecting up to three individual IR absorbing components (i.e. CO, CO₂, CH₄, SO₂) on a continuous basis. Conveniently packaged in either a 19" rack mount or NEMA-4 wall mount enclosure, the Series 7500 can also be supplied with an oxygen sensor, providing the operator with a space-saving, four in one, cost-effective design. The NEMA-4 enclosure can be X or Z-purged to satisfy hazardous area installation requirements.



A high-sensitivity mass flow sensor is utilized for infrared measurements. By utilizing a single beam, single path design in conjunction with a serial dual-layer transmission detector, the Series 7500 delivers long term, drift-free performance. The oxygen concentration in the sample gas can be detected by either a built-in paramagnetic sensor or an externally mounted, in-situ-based zirconium oxide sensor.

The concentration of the desired gases is displayed on a large, easy-to-read back-lit LCD. The user interface is very intuitive and the menu / mode selection buttons, which are readily accessible, provide the operator with dynamic control and extensive diagnostic capabilities.

APPLICATIONS

The Series 7500 is ideally suited for multi-parameter gas analysis requirements for:

- Combustion control within the power, pulp and paper, steel, and cement industries
- Heat treating / Inert gas blanketing atmosphere control
- Bulk-gas impurity analysis within the air separation industry
- Anaerobic digester / Bio-gas / Land-fill gas analysis
- Vent gas analysis of oxyhydrochlorination reactors (EDC)

FEATURES

- Simultaneous measurement of up to four components
- Excellent long-term stability
- Slide-out, chassis design to facilitate any optical or maintenance adjustments required to fine tune analyzer performance (7500A)
- In-depth, valuable analyzer functions attainable from the front-panel user interface buttons
 - o Follow & Hold output signal control (during calibration)
 - o Remote range change control
 - o Range ID signals
 - o Auto-calibration with user adjustable frequency and gas flow time setting programming capabilities
 - o Remote auto-calibration initiation
 - o Auto-calibration status contacts
 - o Instrument or calibration error contact outputs

OPTIONS

- Percent O₂ detector – Paramagnetic (built-in) or ZrO₂ (externally installed), user preference
- O₂ correction (the conversion of measured CO and SO₂ readings into values at standard O₂ concentration).
- Communication functions:
 - o RS-232C (9 pins D-Sub connector)
 - o Half-duplex bit serial
 - o Modbus protocol

- Off-gas analysis on PTA and Maleic Anhydride reactors
- Fluid Catalytic Cracker (FCC) regeneration gas analysis
- Ammonia / Fertilizer process gas stream analysis
- Continuous emissions monitoring

SPECIFICATIONS

Principle of measurement: Non-dispersive infrared (NDIR) absorption method. Single source, dual-layer transmission design.

Measurable gas components and measuring range:

	Min range	Max range
CO₂	0 - 500 ppm	0 - 100 vol%
CO	0 - 200 ppm	0 - 100 vol%
CH₄	0 - 1000 ppm	0 - 100 vol%
SO₂	0 - 500 ppm	0 - 5000 ppm
O₂ (built in)	0 - 5 vol%	0 - 100 vol%
O₂ (external zirconia)	0 - 5 vol%	0 - 25 vol%

- Maximum four components measurement including oxygen
- 1 or 2 measuring ranges per component
- Measuring range ratio: $\leq 1:5$ (except built-in O₂)
 $\leq 1:20$ (built in O₂)

A maximum of four components and two ranges are selectable including an oxygen measurement. Other gases can be measured with the Series 7500. Please contact the factory for details.

Accuracy:	$\pm 1\%$ of FS range
Display:	Digital indication (4 digits – back-lit LCD)
Analog output signal:	4-20 mADC or 0-1 VDC; 550 ohms max for 4-20 mADC and 100k ohms for 0-1 VDC
Analog input signal:	For externally mounted ZrO ₂ percent O ₂ sensor (purchased separately)
Relay contacts:	250 VAC / 2 Amp; resistive load; all relay contacts are isolated from internal circuits
Contact input:	Non-voltage contact (On / 0V; Off / 5V, 5mA flowing at ON). Contact inputs are not isolated from one another.

Note: Only M3.5 screw terminals are used for signal inputs and outputs

Power supply:	100 VAC – 240 VAC; 50/60 Hz
Power consumption:	70 VA max
Operating conditions:	-5 to 45° C

Enclosure:

- Model 7500A: Steel casing (19" rack design for indoor use)
- Dimensions: 7" H x 19.0" W x 19.4" D
177 x 483 x 493 mm
- Weight: Approx 25 lbs (configuration dependent)

- Model 7500B: NEMA-4 enclosure (wall mount design)
- Dimensions & Weight: Application dependent
- X & Z-Purge configurations available for hazardous area installations

Wetted parts:

- Inlet / Outlet fittings: SUS304 NPT ¼ internal thread or Rc 1/4
- Sample cell: SUS304 / Neoprene Rubber
- Cell windows: CaF₂
- Internal tubing: Application dependent (Std = Toaron tubing)

Standard sample gas conditioning requirements:

- Flow rate: 1L / min, ± 0.5 L / min
- Gas temperature: 0 to 50° C
- Pressure: 10 kPa or less (1.5 psig); sample gas should vent to atmospheric pressure.
- Dust: 100ug / Nm³ or less in particle size of 0.3um or less.
- Moisture: Below the point at which saturation occurs at ambient temperature.

EC DIRECTIVE COMPLIANCE

The product conforms to the requirements of the Low Voltage Directive 73/23/EEC and EMC directive 89/336/EEC (as amended by Directive 92/31/EEC), both as amended by Directive 93/68/EEC. It conforms to following standards for product safety and electromagnetic compatibility:

EN61010-1: 2001 Safety requirements for electrical equipment for measurement, control and laboratory use.


"Installation Category II"

"Pollution Degree 2"

EN61326-1: 1997, A1: 1998, A2: 2001

Electrical equipment for measurement, control and laboratory use — EMC requirements.

Series 7500 Infrared Gas Analyzers

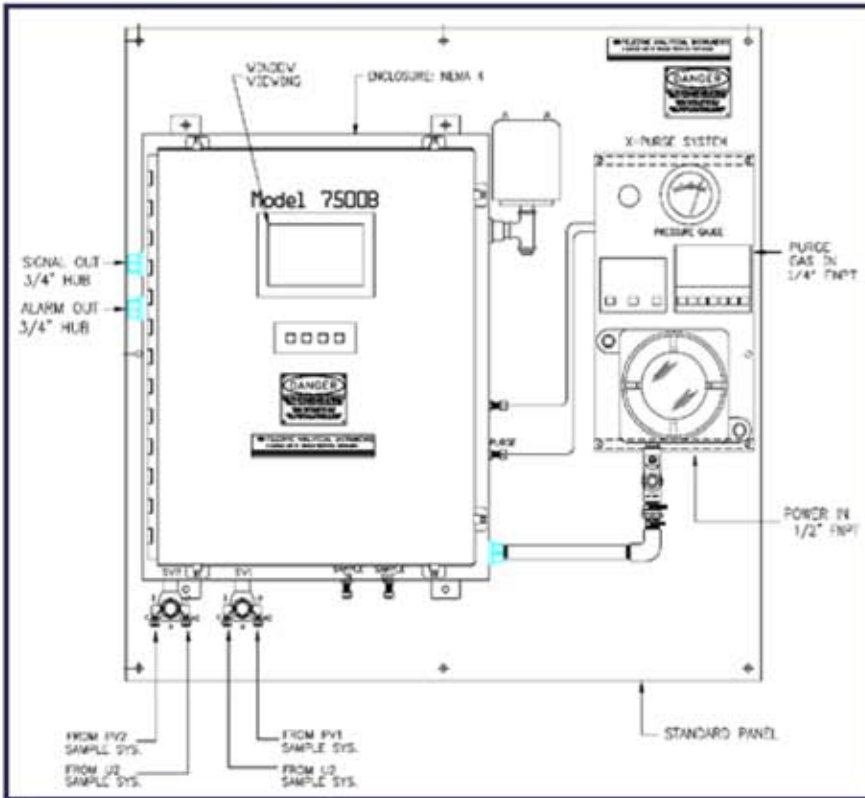

PERFORMANCE

Repeatability: $\pm 0.5\%$ of full scale

Linearity: $\pm 1\%$ of full scale

Zero drift: $\pm 2\%$ of full scale / week

Span drift: $\pm 2\%$ of full scale / week


Response time (for 90% FS response):

One or two component measurement: within 15 seconds including replacement time of sample gas.

More than three components measurement: within 30 seconds including replacement time of sample gas.

**Principle diagram
of NDIR type measurement
(for CO₂, CO, CH₄, SO₂)**

Model 7500B serves as the explosion proof configuration. The NEMA-4 enclosure can be X or Z-purged to satisfy hazardous area installation requirements.

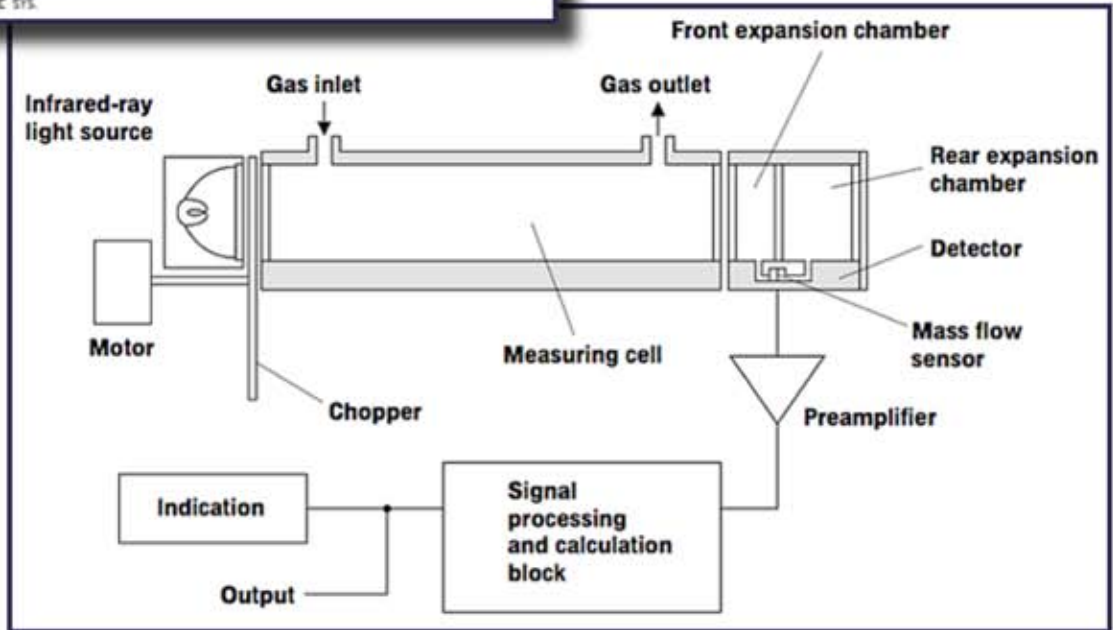

TELEDYNE ANALYTICAL INSTRUMENTS

A Teledyne Technologies Company

Teledyne Analytical Instruments (TAI) - Factory
16830 Chestnut Street
City of Industry, CA 91748, USA
TOLL FREE (888) 789-8168
TEL: (626) 934-1500
FAX: (626) 934-1651
www.teledyne-ai.com

TAI - South America
Contact: Angel Luhia
Av. Delleplane 4208
(C1407H2W) Buenos Aires
ARGENTINA
TEL & FAX: 54.11.4601-0050
MOB: 54.911.5388-3664
E-mail: aluhia@taisudamerica.com.ar
E-mail: info@taisudamerica.com.ar

TAI - Houston & Gulf Coast Region USA
Shana Kiser
Sales Engineer
TEL: 281-557-8740
MOB: 281-685-3758
FAX: 281-557-8741
E-mail: skiser@teledyne.com

TAI - So. East Asia
No. J-03-2, Dataran Glomac
Jalan SS6/18, Pusat Bandar Kelana Jaya
47301 Kelana Jaya
Selangor
MALAYSIA
TEL: +603 7805 7712
FAX: +603 7805 7710
MOB: +6012 2010 610
E-mail: slim@teledyne.com

TAI - Southeast USA
Dave Solomon
Sales Manager
TEL: 281-471-2935
MOB: 281-414-8236
FAX: 281-471-3091
E-mail: dsolomon@teledyne.com

TAI - Middle East and India
Contact: Manoj Kumar
PO Box 8976
Y2-113 SAIF Zone
Sharjah
UNITED ARAB EMIRATES (UAE)
TEL: 971.6.5575.704
MOB: 971.5.0634.5537
E-mail: mkuumar@teledyne.com

Warranty

Instrument is warranted for one year against defects in material or workmanship

NOTE: Specifications and features will vary with application. The above are established and validated during design, but are not to be construed as test criteria for every product. All specifications and features are subject to change without notice.

